

5561



Pattern Number:

# CG American Stone

1/2" (13mm) mortar joint  
 1" (25mm) maximum relief  
 7" (178mm) vertical C-C  
 10" to 30" width stones  
 42"x120" panel size  
 Pattern 5503 modified to 1" relief  
 and 7" vertical C-C

## Spec Formliners, Inc.

Impressive on Concrete

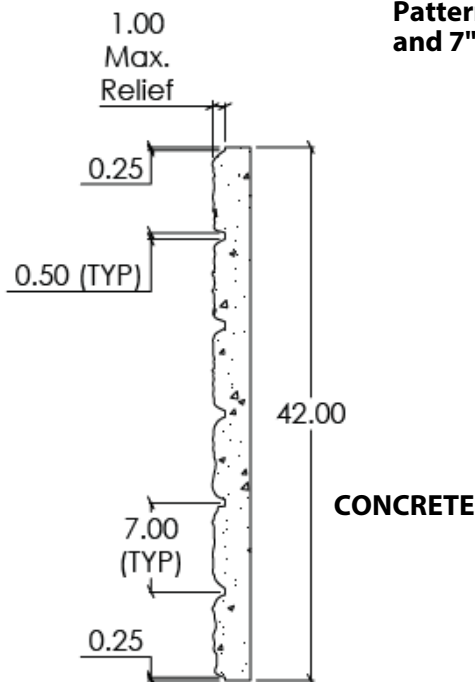

Visit [www.specformliners.com](http://www.specformliners.com) for application guides and technical information

### ThermoSpec™ SINGLE OR MULTI-USE PLASTIC

| Property                                     | HIPS      | ABS       |
|--|-----------|-----------|
| Tensile D638                                 | 3700      | 5300      |
| IFlexural D7905                              | -         | 9300      |
| Hardness D786                                | -         | 105       |
| <b>Material Weights - lbs/ft<sup>2</sup></b> |           |           |
| 0.070 MIL                                    | 0.110 MIL | 0.150 MIL |
| 0.393  | 0.621     | 0.843     |
| <b>Thicknesses Available</b>                 |           |           |
| 0.070, 0.090, 0.110, 0.145, 0.155, 0.180     |           |           |

### ElastoSpec Lite™ Semi-Elastomeric MULTI-USE MATERIAL

| Property                                     | ASTM  | Rating   |
|--|-------|----------|
| Shore A/D                                    | D2240 | 40D/90A  |
| Tensile                                      | D412  | 1900 psi |
| Elongation                                   | D412  | 300%     |
| Tear Strength                                | D2370 | 23 MPa   |
| <b>Material Weights - lbs/ft<sup>2</sup></b> |       |          |
| Varies by Pattern                            |       |          |
| <b>Maximum Thickness</b>                     |       |          |
| 1/4" + Relief                                |       |          |

### ElastoSpec™ 100% Solid Urethane BONDED TO 3/4" PLYWOOD

| Property                                     | ASTM  | Rating   |
|--|-------|----------|
| Shore A                                      | D2240 | 55-65    |
| Tensile                                      | D412  | 1400 psi |
| Elongation                                   | D638  | 600%     |
| Tear Strength                                | D624  | 200 pli  |
| <b>Material Weights - lbs/ft<sup>2</sup></b> |       |          |
| Varies by Pattern                            |       |          |
| <b>Maximum Thickness</b>                     |       |          |
| 1-1/8" + Relief                              |       |          |

Call for ThermoSpec™ Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available

ElastoSpec™ Customized Panel Sizes and Art Panels





**Spec Formliners, Inc.**

Impressive on Concrete

Pattern Number: **5561**

### CG American Stone

- 1/2" (13mm) mortar joint
- 1" (25mm) maximum relief
- 7" (178mm) vertical C-C
- 10" to 30" width stones
- 42"x120" panel size
- Pattern 5503 modified to 1" relief and 7" vertical C-C

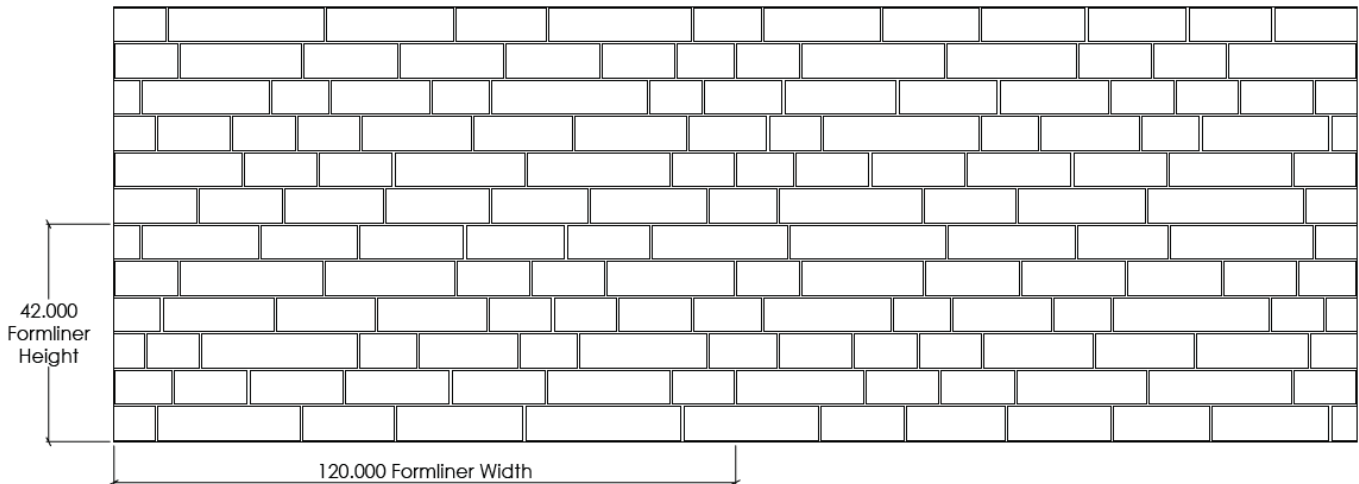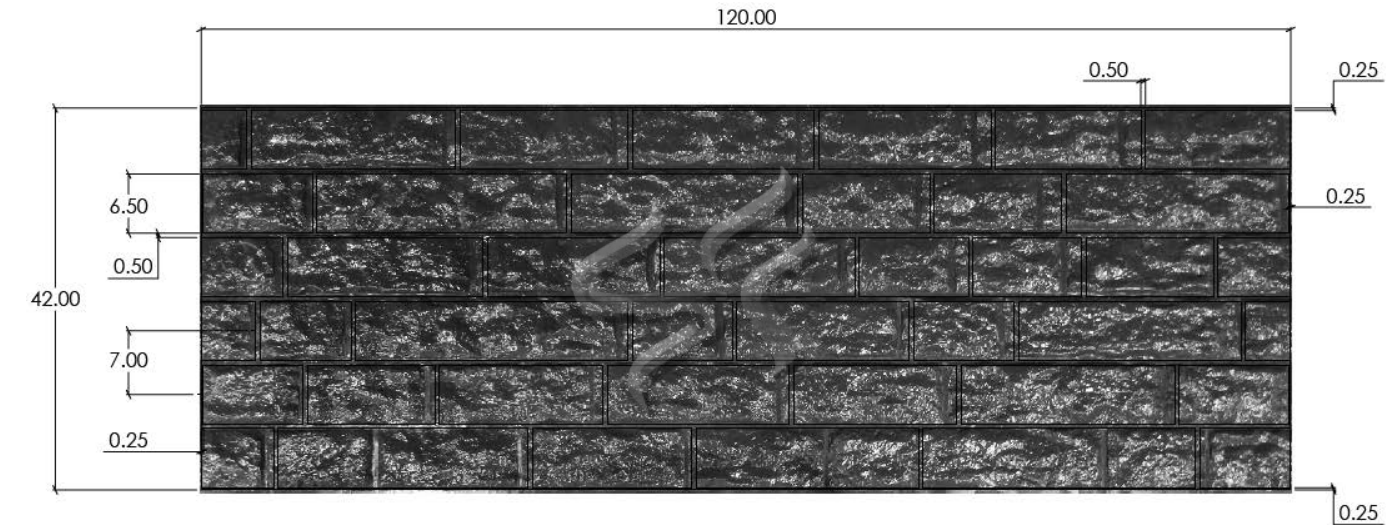

**Note: Panels match top and bottom, side to side and rotated 180°.**